

Photo DMOS-FET Relay

Description

The LT333 is a miniature 2-Form A solid state relay in a 8 pin SOP package that employs optically coupled MOSFET technology to provide 1500V of input to output isolation. The optically coupled input is controlled by a highly efficient GaAlAs infrared LED and MOS FETs on the output side.

Features

- SOP package 8 Pin type in miniature design (4.4×9.4×2.0mm / .173×.37×.083inch)
- Low driver power requirements (TTL/CMOS Compatible)
- No moving parts
- High reliability
- Arc-Free with no snubbing circuits
- 1500Vrms Input/Output isolation
- Tape & Reel version available

Applications

- Telecommunications (PC, Electronic notepad)
- Measuring and Testing equipment
- Industrial control
- Security equipments
- High speed inspection machine

Outline Dimensions

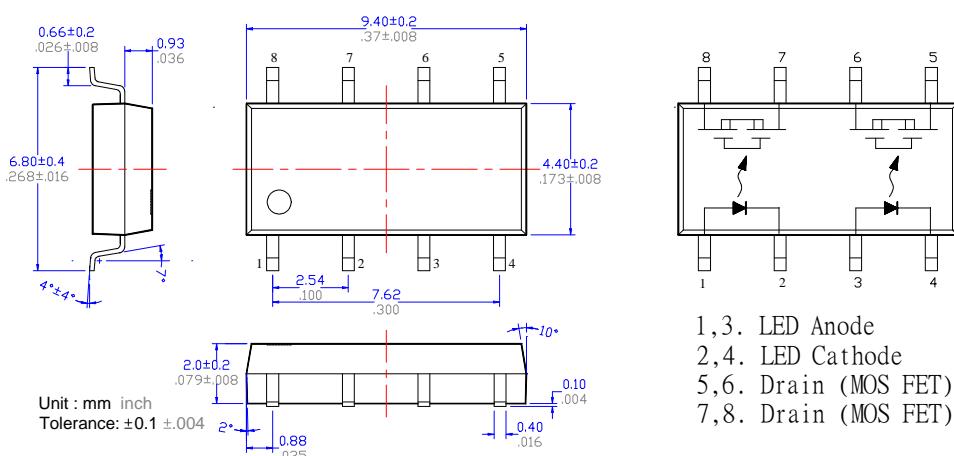


Photo DMOS-FET Relay Specifications

Part Name: LT333

(Load voltage: 60V / Load current: 200mA)

Absolute Maximum Ratings (Ambient Temperature: 25°C)













| Item | | Symbol | Value | Units | Note |
|---------------------------|--------------------------|-------------------|-------------|------------------|---------------------|
| Input | Continuous LED Current | I _F | 50 | mA | |
| | Peak LED Current | I _{FP} | 1000 | mA | f=100Hz, duty=1% |
| | LED Reverse Voltage | V _R | 5 | V | |
| | Input Power Dissipation | P _{In} | 75 | mW | |
| Output | Load Voltage | V _L | 60 | V(AC peak or DC) | |
| | Load Current | I _L | 200 | mA | |
| | Peak Load Current | I _{Peak} | 1.0 | A | 100ms(1 pulse) |
| | Output Power Dissipation | P _{out} | 450 | mW | |
| Total Power Dissipation | | P _T | 500 | mW | |
| I/O Breakdown Voltage | | V _{I/O} | 1500 | Vrms | RH=60%, 1min |
| Operating Temperature | | T _{opr} | -40 to +85 | °C | |
| Storage Temperature | | T _{stg} | -40 to +100 | °C | |
| Pin Soldering Temperature | | T _{sol} | 260 | °C | 10 sec max. |

Electrical Specifications (Ambient Temperature: 25°C)


| Item | | Symbol | MIN. | TYP. | MAX. | Units | Conditions |
|--------------|---------------------------|-------------------|------------------|------|------|-------|---|
| Input | LED Forward Voltage | V _F | | 1.2 | 1.4 | V | I _F =10mA |
| | Operation LED Current | I _{Fon} | | 0.5 | 2.0 | mA | |
| | Recovery LED Current | I _{Foff} | 0.1 | 0.35 | | mA | |
| | Recovery LED Voltage | V _{Foff} | 0.7 | | | V | |
| Output | On-Resistance | R _{on} | | 2 | 5 | Ω | I _F =5mA, I _L =100mA, Time to flow is within 1 sec. |
| | Off-State Leakage Current | I _{Leak} | | | 1 | uA | V _L =Rating |
| | Output Capacitance | C _{out} | | 12 | | pF | V _L =0, f=1MHz |
| Transmission | Turn-On Time | T _{on} | | 0.15 | 0.5 | ms | I _F =5mA, I _L =100mA, |
| | Turn-Off Time | T _{off} | | 0.05 | 0.5 | ms | |
| Coupled | I/O Isolation Resistance | R _{I/O} | 10 ¹⁰ | | | Ω | DC500V |
| | I/O Capacitance | C _{I/O} | | 0.8 | 1.5 | pF | f=1MHz |



Reference Data

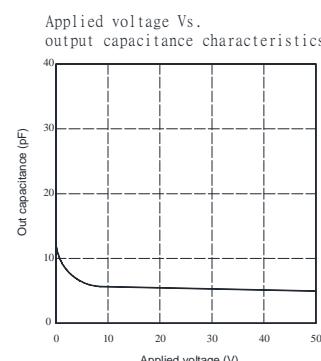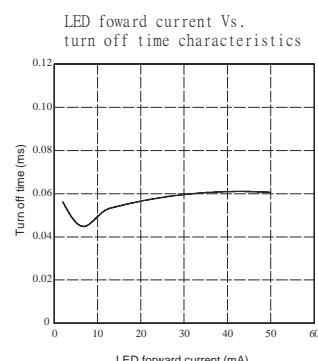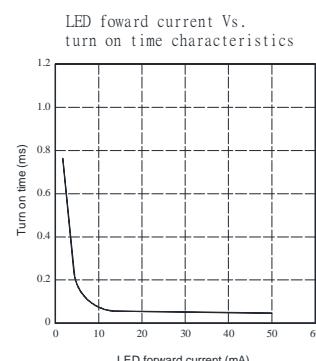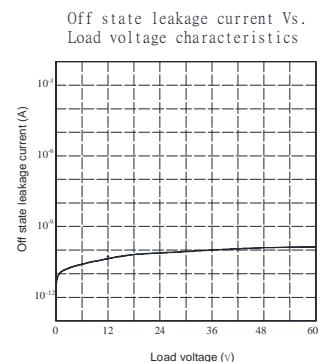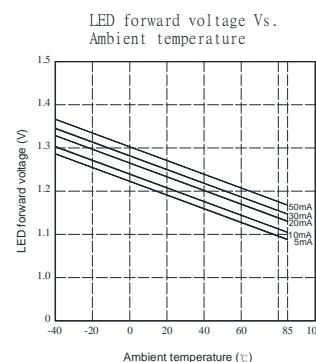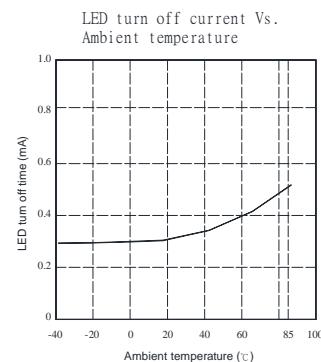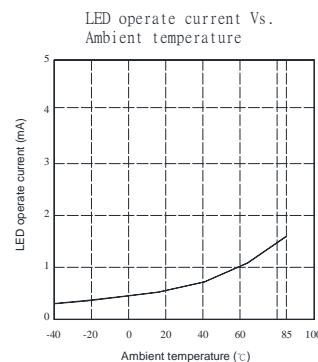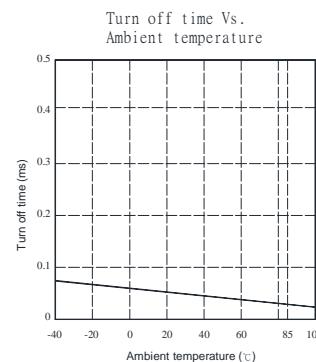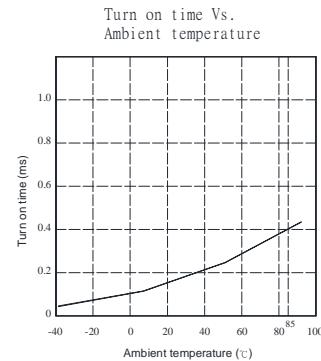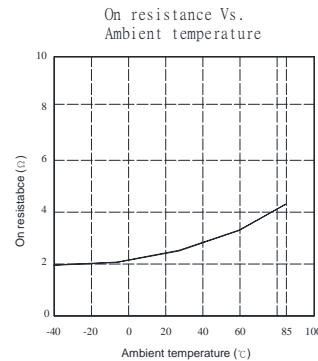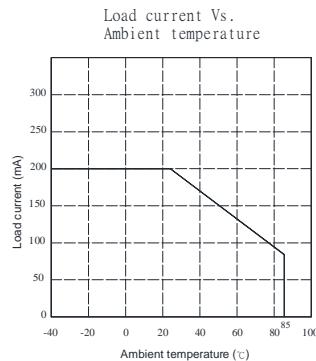


Taping Specifications for Surface Mount Devices

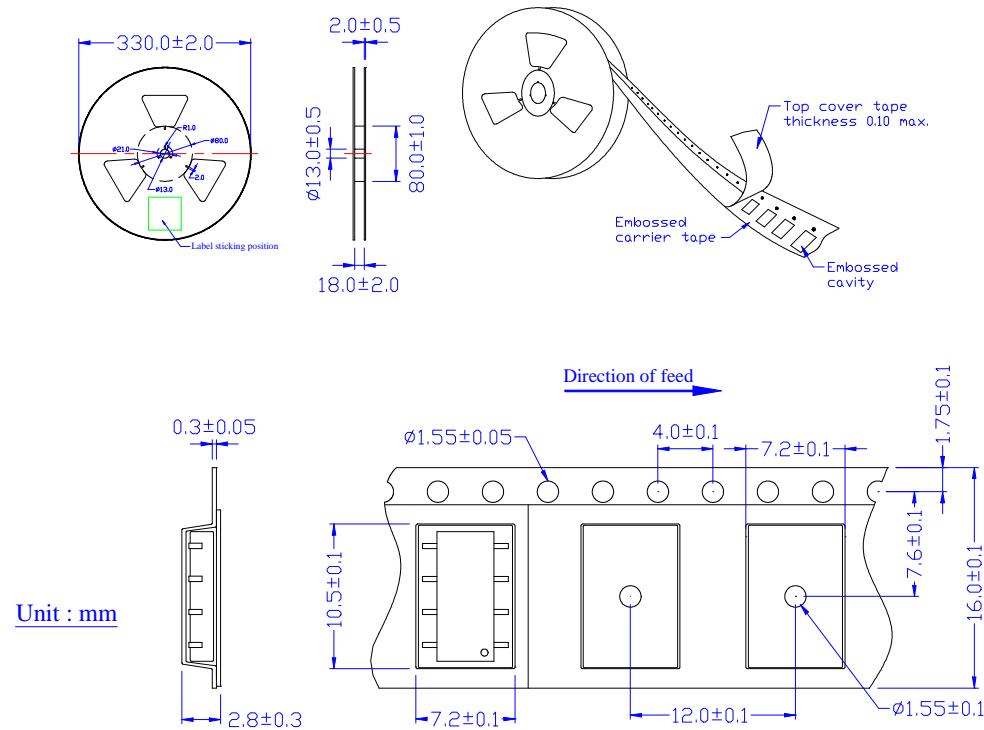


Recommended Mounting Pad

(Top view)

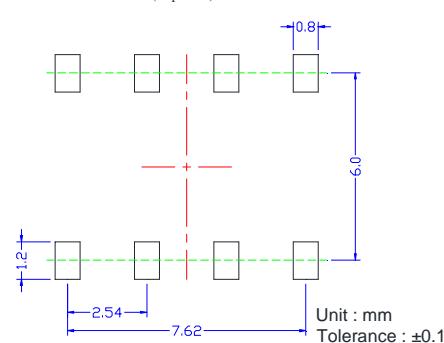

Marking

(Each photo MOS Relay shall be marked with the following information)

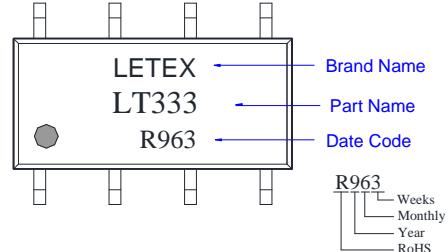

- Note:
1. There shall be leader of 230 mm minimum which may consist of carrier and or cover tape follower by a minimum of 160 mm of carrier tape sealed with cover tape.
 2. There shall be a minimum of 160 mm of empty component pockets sealed with cover tape.
 3. Devices are pockets in accordance with EIA standard EIA-481-A and specifications given above.
 4. Packaging: 1,000pcs per reel, 2 reel per box, 5 boxes per carton.