

Photocoupler

Part Name: LA213

Description

LA213 photocoupler is an optically coupled pair employing GaAs infrared LED and a NPN silicon photodarlington.

Features


- High current transfer ratio
(CTR: Min. 600% at IF=1mA)
- SOP package 4 Pin type in miniature design
- 2500V rms Input/Output isolation

Applications

- System appliances, measuring instruments
- Telecommunication
- PLCs
- Signal transmission between circuits of different potentials
- Registers, copiers, automatic vending

Outline Dimensions

(Unit: mm inch)

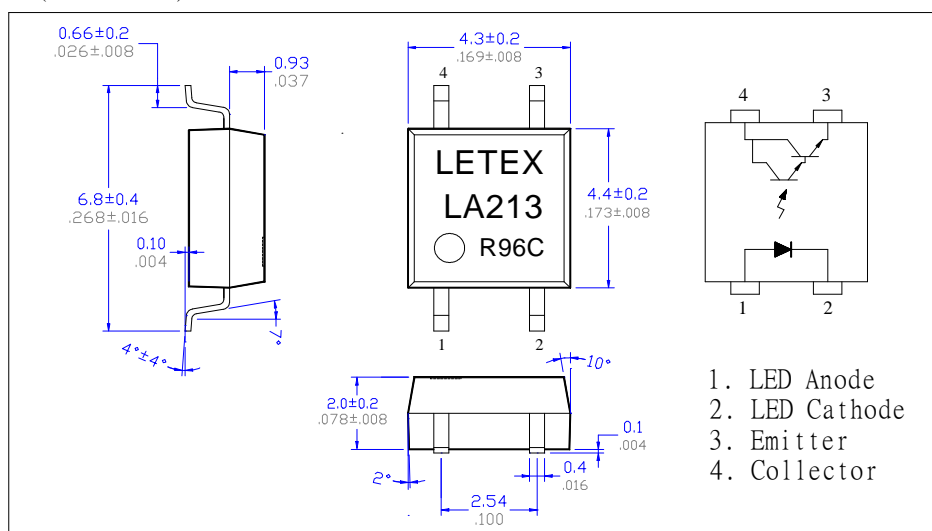

Part Name: LA213**Absolute Maximum Ratings (Ambient Temperature: 25°C)**


Item		Symbol	Rating	Units	Note
Input	Forward Current	IF	50	mA	
	Reverse Voltage	VR	5	V	
	Peak Forward Current	IFP	1	A	
Output	Collector to Emitter Voltage	Vceo	35	V	Ic=1mA, IB=0
	Emitter to Collector Voltage	Veco	6	V	IE=100μA, IB=0
	Collector Current	Ic	80	mA	
	Power Dissipation	Pc	150	mW	
I/O Breakdown Voltage		VI/O	2500	Vrms	RH=60%, 1min
Power Dissipation		PD	200	mW	
Storage Temperature		Tstg	-55 to +125	°C	
Operating Temperature		Top	-55 to +100	°C	
Soldering Temperature		TSol	260	°C	10 seconds max.

Electrical Specifications (Ambient Temperature: 25°C)


Item		Symbol	MIN.	TYP.	MAX.	Units	Conditions
Input	Forward Voltage	V _F		1.2	1.4	V	I _F = 20mA
	Reverse Current	I _R			10	μA	V _R =5V
	Junction Capacitance	C _t		30		pF	V=0, f=1.0KHz
Output	C-E Breakdown Voltage	V _{ceo}	35			V	I _c =0.5mA
	E-C Breakdown Voltage	V _{eco}	6			V	I _e =0.1mA
	Collector Dark Current	I _{ceo}			100	nA	V _{ce} =20V, I _F =0
Coupled	Current Transfer Ratio	CTR	600	1600	7000	%	I _F = 1mA, V _{ce} =5V
	Collector Saturation Voltage	V _{ce(sat)}			1	V	I _F =20mA, I _c =1mA
	Isolation Resistance	R _{I/O}			10 ⁹	Ω	V=500V DC
	Isolation Capacitance	C _{I/O}		1.0		pF	V=0, f=1.0MHz
	Rise Time	t _r			300	μs	V _{ce} =5V, I _c =2mA,
	Fall Time	t _f			250	μs	RL=100Ω

Reference Data


Forward current Vs.
Ambient temperature




Collector power dissipation Vs.
Ambient temperature




Peak forward current Vs.
Duty ratio




Forward current Vs.
Forward voltage




Current transfer ratio Vs.
Forward current




Collector current Vs.
Collector-Emitter voltage




Relative CTR Vs.
Ambient temperature




Collector-Emitter saturation voltage Vs.
Ambient temperature




Collector dark current Vs.
Ambient temperature




Collector-Emitter saturation voltage Vs.
Forward current




Response time Vs.
Load resistance



Taping Specifications for Surface Mount Devices

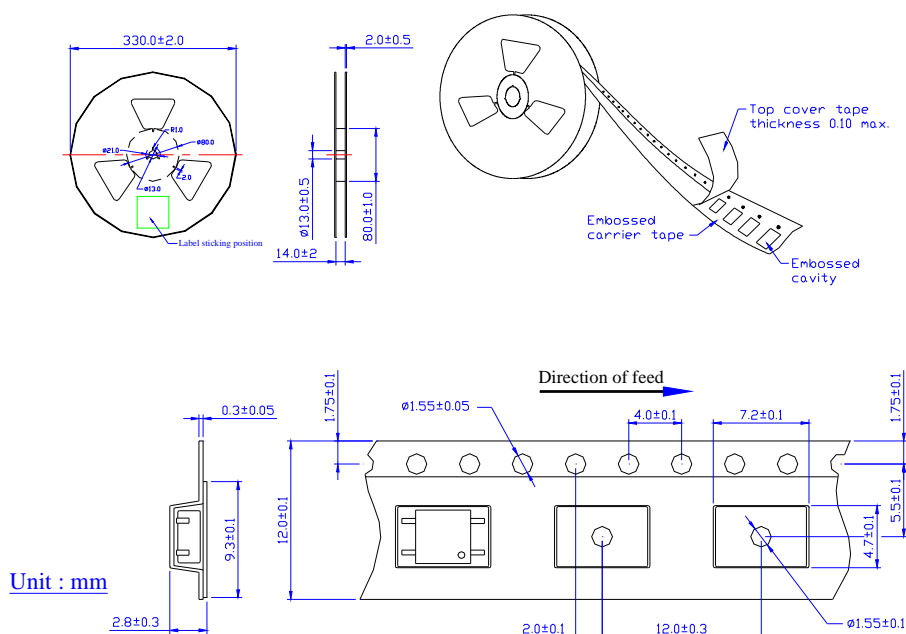


Recommended Mounting Pad

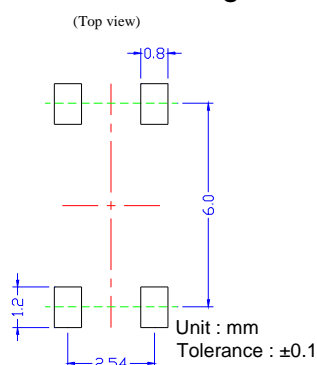

Marking

(Each photo MOS Relay shall be marked with the following information)

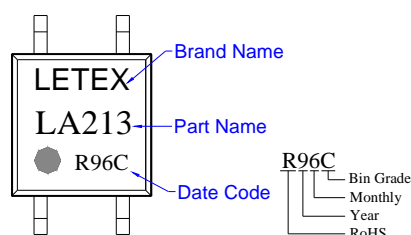

- Note:
1. There shall be leader of 230 mm minimum which may consist of carrier and or cover tape follower by a minimum of 160 mm of carrier tape sealed with cover tape.
 2. There shall be a minimum of 160 mm of empty component pockets sealed with cover tape.
 3. Devices are pockets in accordance with EIA standard EIA-481-A and specifications given above.
 4. Packaging: 2,000pcs per reel, 2 reel per box, 5 boxes per carton.