

## Photo DMOS-FET Relay

### Description

The **LT828** is a 1-Form A solid state relay in a 6 pin DIP package that employs optically coupled MOSFET technology to provide 3750V/5000V of input to output isolation. The optically coupled input is controlled by a highly efficient GaAlAs infrared LED and MOS FETs on the output side.


### Features

- DIP package 6 Pin type in miniature design (8.8×6.4×3.4mm / .173×.169×.083inch)
- Low driver power requirements (TTL/CMOS Compatible)
- No moving parts
- High reliability
- Arc-Free with no snubbing circuits
- 3750/5000Vrms Input/Output isolation

### Applications

- Telecommunications (PC, Electronic notepad)
- Measuring and Testing equipment
- Industrial control
- Security equipments
- High speed inspection machine

### Outline Dimensions

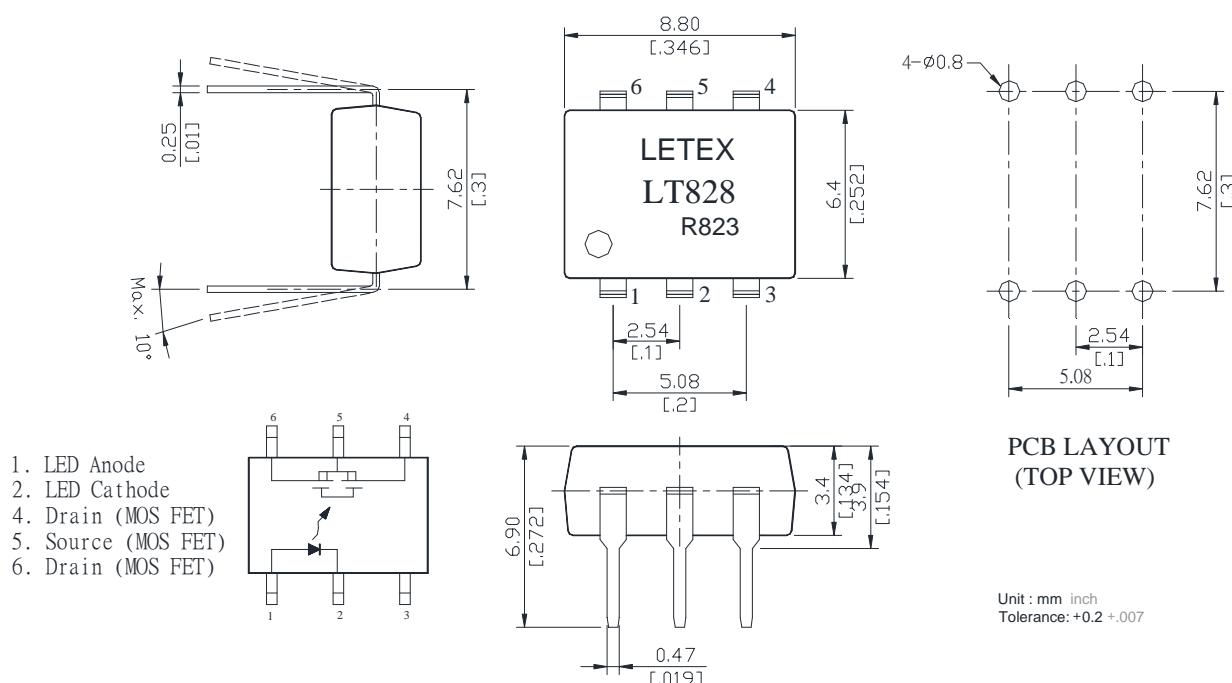

**Photo DMOS-FET Relay Specifications****Part Name: LT828**

(Load voltage:40V / Load current: AC:4.5A)

**Absolute Maximum Ratings (Ambient Temperature: 25°C)**

| Item                            | Symbol                  | Value             | Units       | Note             |                     |
|---------------------------------|-------------------------|-------------------|-------------|------------------|---------------------|
| Input                           | Continuous LED Current  | I <sub>F</sub>    | 50          | mA               |                     |
|                                 | Peak LED Current        | I <sub>FP</sub>   | 1000        | mA               | f=100Hz,<br>duty=1% |
|                                 | LED Reverse Voltage     | V <sub>R</sub>    | 5           | V                |                     |
|                                 | Input Power Dissipation | P <sub>In</sub>   | 75          | mW               |                     |
| Output                          | Load Voltage            | V <sub>L</sub>    | 40          | V(AC peak or DC) |                     |
|                                 | Load Current            | I <sub>L</sub>    | 4.5         | A                | A AC                |
|                                 |                         |                   | 5.0         | A                | B DC                |
|                                 |                         |                   | 7.0         | A                | C DC                |
|                                 | Peak Load Current       | I <sub>Peak</sub> | 9.5         | A                | 300 μs(1 pulse)     |
| Output Power Dissipation        |                         | P <sub>out</sub>  | 500         | mW               |                     |
| Total Power Dissipation         |                         | P <sub>T</sub>    | 550         | mW               |                     |
| I/O Breakdown Voltage           |                         | V <sub>I/O</sub>  | 3750        | Vrms             | RH=60%, 1min        |
| I/O Breakdown Voltage(Suffix-V) |                         | V <sub>I/O</sub>  | 5000        | Vrms             | RH=60%, 1min        |
| Operating Temperature           |                         | T <sub>opr</sub>  | -40 to +85  | °C               |                     |
| Storage Temperature             |                         | T <sub>stg</sub>  | -40 to +100 | °C               |                     |
| Pin Soldering Temperature       |                         | T <sub>sol</sub>  | 260         | °C               | 10 sec max.         |

**Electrical Specifications (Ambient Temperature: 25°C)**

| Item         | Symbol                    | MIN.              | TYP.             | MAX.  | Units | Conditions  |
|--------------|---------------------------|-------------------|------------------|-------|-------|---|
| Input        | LED Forward Voltage       | V <sub>F</sub>    |                  | 1.3   | V     | I <sub>F</sub> =10mA  |
|              | Operation LED Current     | I <sub>Fon</sub>  |                  | 1.0   | mA    |   |
|              | Recovery LED Current      | I <sub>Foff</sub> |                  | 0.35  | mA    |   |
|              | Recovery LED Voltage      | V <sub>Foff</sub> | 0.7              |       | V     |   |
| Output       | On-Resistance             | R <sub>on</sub>   |                  | 0.033 | 0.05  | Ω I <sub>F</sub> =10mA, I <sub>L</sub> =Rating, Time to flow is within 1 sec. |
|              | Off-State Leakage Current | I <sub>Leak</sub> |                  | 1.0   | uA    | V <sub>L</sub> =Rating  |
|              | Output Capacitance        | C <sub>out</sub>  |                  | 690   | pF    | V <sub>L</sub> =0, f=1MHz   |
| Transmission | Turn-On Time              | T <sub>on</sub>   |                  | 1.5   | ms    | I <sub>F</sub> =10mA, I <sub>L</sub> = Rating                                 |
|              | Turn-Off Time             | T <sub>off</sub>  |                  | 0.05  | ms    |   |
| Coupled      | I/O Isolation Resistance  | R <sub>I/O</sub>  | 10 <sup>10</sup> |       | Ω     | DC500V  |
|              | I/O Capacitance           | C <sub>I/O</sub>  |                  | 1.0   | 1.5   | pF f=1MHz   |



## Reference Data

