

## Photo DMOS-FET Relay

### Description

The **LT633** is a 1-Form A solid state relay in a 4 pin SMD package that employs optically coupled MOSFET technology to provide 3750V/5000V of input to output isolation. The optically coupled input is controlled by a highly efficient GaAlAs infrared LED and MOS FETs on the output side.


### Features

- Low driver power requirements (TTL/CMOS Compatible)
- High reliability
- Arc-Free with no snubbing circuits
- 3750/5000Vrms Input/Output isolation
- Tape & Reel version available

### Applications

- Telecommunications (PC, Electronic notepad)
- Measuring and Testing equipment
- Industrial control
- Security equipments
- High speed inspection machine

### Outline Dimension

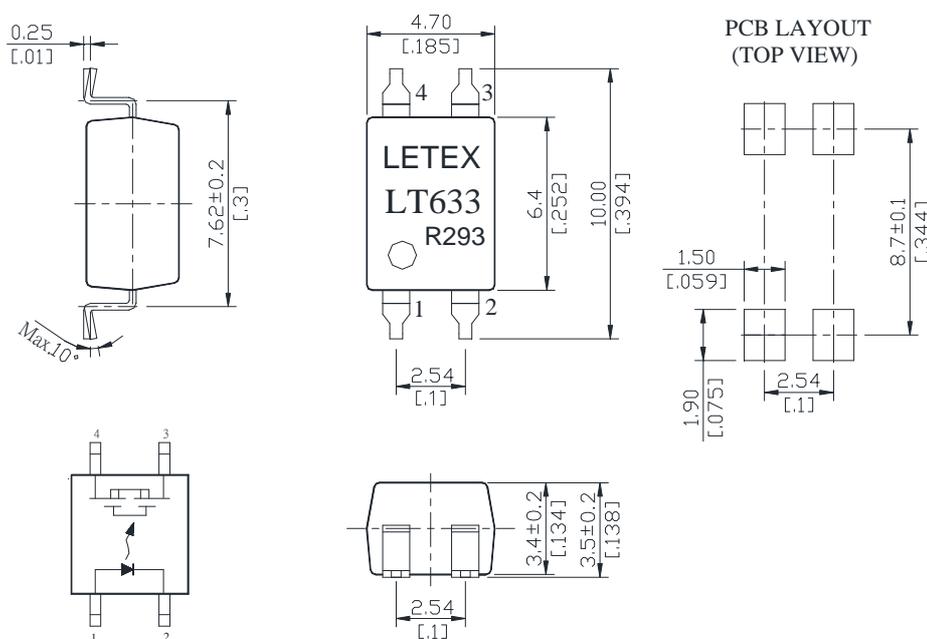

1. LED Anode
2. LED Cathode
3. Drain (MOS FET)
4. Drain (MOS FET)

Unit : mm [inch]  
Tolerance: ±0.2 [±.007]

## Photo DMOS-FET Relay Specifications

**Part Name: LT633**

(Load voltage: 60V / Load current: 200mA)

Absolute Maximum Ratings (Ambient Temperature: 25°C)


Item	Symbol	Value	Units	Note	
Input	Continuous LED Current	I <sub>F</sub>	50	mA	
	Peak LED Current	I <sub>FP</sub>	1000	mA	f=100Hz, duty=1%
	LED Reverse Voltage	V <sub>R</sub>	5	V	
	Input Power Dissipation	P <sub>In</sub>	75	mW	
Output	Load Voltage	V <sub>L</sub>	60	V(AC peak or DC)	
	Load Current	I <sub>L</sub>	200	mA	
	Peak Load Current	I <sub>Peak</sub>	600	mA	100ms(1 pulse)
	Output Power Dissipation	P <sub>out</sub>	450	mW	
Total Power Dissipation	P <sub>T</sub>	350	mW		
I/O Breakdown Voltage	V <sub>I/O</sub>	3750	V <sub>rms</sub>	RH=60%, 1min	
I/O Breakdown Voltage(Suffix-V)	V <sub>I/O</sub>	5000	V <sub>rms</sub>	RH=60%, 1min	
Operating Temperature	T <sub>Opr</sub>	-40 to +85	-40 to +85		
Storage Temperature	T <sub>Stg</sub>	-40 to +100	-40 to +100		
Pin Soldering Temperature	T <sub>Sol</sub>	260	260	10 sec max.	

Electrical Specifications (Ambient Temperature: 25°C)


Item	Symbol	MIN.	TYP.	MAX.	Units	Conditions
Input	LED Forward Voltage	V <sub>F</sub>	1.2	1.5	V	I <sub>F</sub> =10mA
	Operation LED Current	I <sub>F on</sub>	0.5	5.0	mA	
	Recovery LED Current	I <sub>F off</sub>	0.35	0.5	mA	
	Recovery LED Voltage	V <sub>F off</sub>	0.7		V	
Output	On-Resistance	R <sub>on</sub>	2	8	Ω	I <sub>F</sub> =10mA, I <sub>L</sub> =100mA, Time to flow is within 1 sec.
	Off-State Leakage Current	I <sub>Leak</sub>		1.0	uA	V <sub>L</sub> =Rating
	Output Capacitance	C <sub>out</sub>		12	pF	V <sub>L</sub> =0, f=1MHz
Transmission	Turn-On Time	T <sub>on</sub>	0.5	1.0	ms	I <sub>F</sub> =10mA, I <sub>L</sub> =100mA,
	Turn-Off Time	T <sub>off</sub>	0.05	0.5	ms	
Coupled	I/O Isolation Resistance	R <sub>I/O</sub>	10 <sup>10</sup>		Ω	DC500V
	I/O Capacitance	C <sub>I/O</sub>		0.8	1.5	pF

## Reference Data


Load current Vs. Ambient temperature




On resistance Vs. Ambient temperature




Turn on time Vs. Ambient temperature




Turn off time Vs. Ambient temperature




LED operate current Vs. Ambient temperature




LED turn off current Vs. Ambient temperature




LED forward voltage Vs. Ambient temperature




Voltage Vs. current characteristics of output at MOS portion




Off state leakage current Vs. Load voltage characteristics




LED forward current Vs. turn on time characteristics




LED forward current Vs. turn off time characteristics



Applied voltage Vs. output capacitance characteristics




### Taping Specifications for Surface Mount Devices

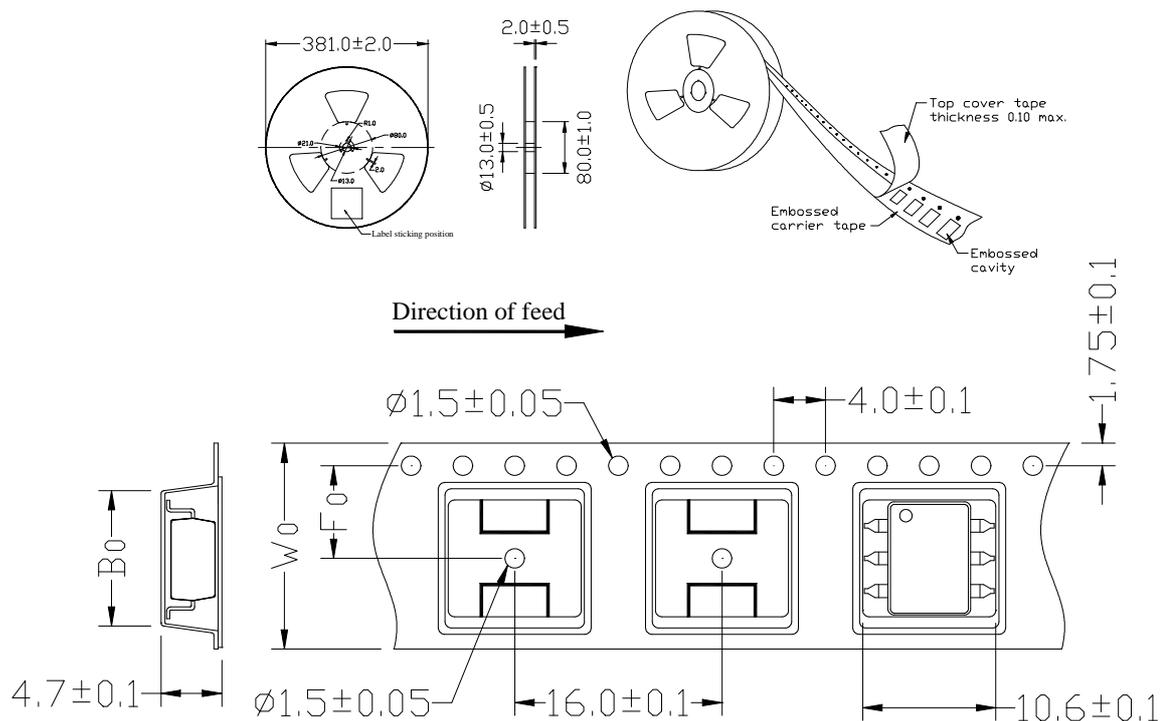

Unit: mm

TYPE	B0±0.1	F0±0.1	W0±0.1	15" REEL/PCS
4P	5.3	7.5	16	1000


### Recommended Mounting Pad

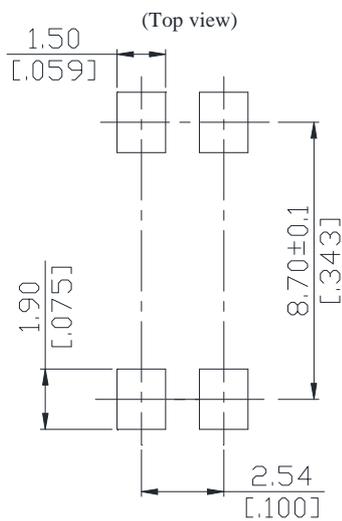

Unit : mm [inch]  
Tolerance : ±0.1

### Marking

(Each photo MOS Relay shall be marked with the following information)

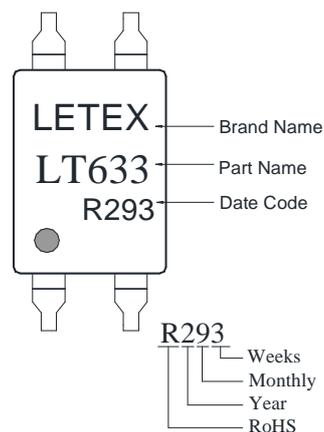

- Note: 1. There shall be leader of 230 mm minimum which may consist of carrier and or cover tape follower by a minimum of 160 mm of carrier tape sealed with cover tape.  
 2. There shall be a minimum of 160 mm of empty component pockets sealed with cover tape.  
 3. Devices are pockets in accordance with EIA standard EIA-481-A and specifications given above.