

Reed Switch specifications

Model No: LDW-1506

Features


- The LDW-1506 is a small single-contact reed switch, it's high density glass seal especially for open type reed relay use.

Applications

- Automotive electronic devices
- Rotation and speed Monitoring
- Door and Window Contacts for Security System
- Communication equipment
- Measurement equipment

Dimensions

Unit in mm

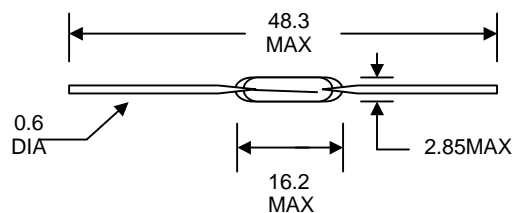

Outer Dimension	Glass Diameter (Max.)	2.85	mm
	Glass Length (Max.)	16.2	mm
	Lead Diameter (Nominal)	0.6	mm
	Overall Length (Max.)	48.3	mm

Electrical Characteristics





Contact form		SPST Form A Center gap
Contact material		Rhodium over palladium
Switching power	(max.)	10 VA
Switching Current	(max.)	0.5 Amp. DC 0.5 Amp. AC
Carry Current	(max.)	1.0 Amp. DC 1.0 Amp. AC
Switching voltage	(max.)	100 VDC
Breakdown voltage	(min.)	250 VDC
Contact resistance	(max.)	150 Miniohms
Insulation resistance	(min.)	10 ¹⁰ Ohms
Contact capacitance	(max.)	0.4 pF
Operate time including bounce	(typ.)	1.0 ms
Release time	(typ.)	0.1 ms
Pull in Range		40 – 80 AT
Drop out		35 – 90%

Note: 1. The specification for VA rating may be exceeded for less sensitive (High AT) switches, and should be decreased for very sensitive (Low AT) switches. Specific life testing for a particular load will be run upon request.

2. Breakdown voltage is measured in the presence of a radioactive ionizing source with leakage current limited to 100 microamperes.

Physical Characteristics

Operating Temperature	-40°C to +125°C
Storage Temperature	-50°C to +155°C
Vibration 10 – 2000 Hz (G ' S MAX)	50g
Shock 11ms. ½ Sine wave (G ' S MAX)	100g
Resonant Frequency (TYP.)	3.0 KHz
Switching Frequency (MAX.)	200 Hz

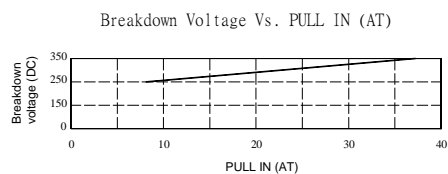

Minimum Life Expectancy

Load	12mDC 3.4W Lamp
Life	10 ⁴

End of Life Definition

1. Contact resistance above 1 ohm.
2. Failure to open (sticking).